

16Amp 230V

Model Name
POM PDU

Model Number
MSH-1623K-08N8



Meter True RMS Current Meter,

Power Monitor Per Outlet Output Current and Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCP/IP, SNMP, DHCP, UDP


Outlet Control Individual, Group, Schedule, Auto Ping

Power Delay Power On/Off Sequence can be Defined

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

Temp./Humidity Option Accessory

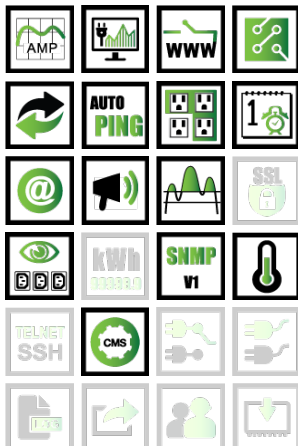

General

Output	(8) IEC320 C13
Input	(1) IEC320 C20 Inlet; Enclosed IEC320 C19 to C20 Power Cord 3 Meters long
Protection	(1) 16 AMP Circuit Breaker

Communication

DHCP Indication	(1) Green LED
Output Status	(8) Green LED
Circuit Status	(8) Red LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
PDU ID	1 Digits Seven Segments for PDU Identification
Current Meter	3 Digits Seven Segments for True RMS Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/-2% +/-0.1AMP

Operation

Nominal Input Voltage	230V
Output Voltage	200V ~ 240V full range
Frequency	50/60HZ full range
Max. Output Current	16 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	160 x 432 x 44.45 mm
Net Weight	3.5 kg

Regulatory Approvals

CE, CISPER 22, CISPER 24, IEC 61000-3-2, IEC 61000-3-3, FCC Part 15 Class A, ICES-003

