

Model Name
POM PDU

Model Number
WHH-1623K-08N8



Meter True RMS Current Meter, Voltage, Frequency, Power Factor, Active Power, Apparent Power, Total kWh, Sub-total kWh.

Power Monitor Per Outlet Output Current and Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCP/IP, SNMP, DHCP, UDP


Outlet Control Individual, Group, Schedule, Auto Ping

Power Delay Power On/Off Sequence can be Defined

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

Temp./Humidity Option Accessory

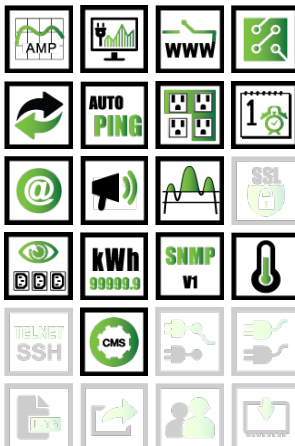

General

Output (8) IEC320 C13
Input (1) IEC320 C20 Inlet; Enclosed IEC320 C19 to C20 Power Cord 3 Meters long
Protection (1) 16 AMP Circuit Breaker

Communication

DHCP Indication (1) Green LED
Output Status (8) Green LED
Circuit Status (8) Red LED
Network (1) RJ45 for Ethernet
Temp./Humidity (1) RJ11 for ENV probe connection
PDU ID 1 Digits for PDU Identification
Meter 3 Digits Seven Segments

Power Information

Voltage +/- 1% @ 80V~260V
Active Power +/- 1% @ 50W~8000W
Apparent Power +/- 1% @ 50VA~8000VA
Frequency +/- 1% @ 50~65Hz
Power Factor +/- 1% @ 0.1~1.0
kWh Range: 0.001kWh ~ 99999.999kWh
Precision: +/-1% @ 50W~8000W, kh=1.0
Current Range: 0A ~ 32 A
Resolution: 0.1A
Precision: +/-2%+/-0.1AMP

Operation

Nominal Input Voltage 230V
Output Voltage 200V~ 240V full range
Frequency 50/60HZ full range
Max. Output 16 Amp
Temperature 0 ~ 45 Celsius degree
Humidity 0% ~ 90%
Size 215 x 432 x 44.45 mm
Net Weight 3.8 kg

Regulatory Approvals

